



CY-VH01 GMDSS

双向甚高频无线电

Two-way VHF radiotelephone



GMDSS特性

FEATURES GMDSS

锂电池
腕带
IP67防水
符合IEC 61097-12标准
中国船级社型式认可
Lithium battery
Wrist strap
Waterproof to IP67
Conforms to IEC 61097-12 standard
CCS approved

一般特征

GENERAL FEATURES

超强5W发射功率，实现超远距离通信；
结构紧凑，采用高强度、耐冲击PVC材料，能承受高处跌落冲击；
体积小、重量轻，单手掌控；
高对比度超大背光液晶显示，功能操作简便。
Super 5 W transmission power, realize the hook from communication;
Compact structure, high strength, impact resistance PVC, can bear high impact;
Small volume, light weight, one hand control;
Large high contrast backlit graphic display, function easy operation.



CY-VH02 COMMON

船用甚高频对讲机

VHF Marine Transceiver

感谢您了解驰洋CY-VH02船用甚高频对讲机，CY-VH02双向甚高频无线电遵照国际标准IEC 61097-12和海安会MSC.149(77)的要求设计、生产，可满足日常船上和现场通信需要。

本船用甚高频对讲机具备优良的防水功能和抗震能力，优质的通话能力，能很好适应船上恶劣环境；操作简便，非熟练人员亦能操作，大部分功能单手即可完成操作；高性能、高可靠性，每个双向甚高频无线电均经过严格检验、测试，确保性能、可靠性达到要求。

Thank you for seeing the CY-VH02 VHF Marine Transceiver of Chiyang, CY-VH02 VHF Marine Transceiver is designed and manufacture meet the requirements of MSC.149(77), IEC 61097-12. meet the daily on the ship and the locale communication needs.

High Water proof and high anti-seismic function, communication hears clearly, adapting to the hostile environment of ship. Easy operate, and you can one hand to operate the most function. Inspect and test every CY-VH01 GMDSS Handheld VHF Radio ensure the quality high performance, and high reliability.

显示和菜单

MENU & DISPLAY

高分辨率显示屏，显示内容：频道编号/功率设置/静噪设置/电池状态等；

此外，通过功能菜单操作员可以设置：

背景灯开关/按键音量/扫描模式/天气警告报警。

The high resolution display and shows, channel No./

power setting/squelch adjusting/ battery state;

In addition, via the function menu the operator can set:

LAMP MODE/ BEEP/ SCAN TYPE/ WX ALERT.



CY-LB02CA充电器

CY-LB02CA CHARGER

12V直流输入充电器，可对整机或单一电池进行充电；

明确指明充电状态，当绿灯亮起，表明充电完成；

输入电源另外配置。

A 12 VDC charger accepting a complete radio or battery alone;

Charging clearly indicated, when a green light on, charging that complete;

The input power supply additional configuration.



CY-VH

Handheld maritime VHF radio

性能参数 (SPECIFICATIONS PARAMETER) :

	CY-VH01	CY-VH02
常规 (General)		
频率范围 (Frequency range) :	154-163MHz	154-163MHz
信道间隔 (Channel spacing) :	25kHz	25kHz
频道数量 (Number of channels) :	98	98
工作温度 (Operating temperature) :	-20°C to +55°C	-20°C to +55°C
尺寸 (Case Size) (W×H×D) : (不包括天线和扣)	56 x 133 x 27.5 mm	56 x 133 x 27.5 mm
重量 (Weight) :	338 g	280 g
发射机 (Transmitter)		
射频输出功率 (RF output power) :	1W (Lo)/5W (Hi)	1W (Lo)/5W (Hi)
频率容差 (Frequency error) :	<+1.5kHz	<+1.5kHz
接收机 (Receiver)		
灵敏度 (Sensitivity) :	0.35 μV for 12 dB SINAD	0.35 μV for 12 dB SINAD
邻道功率 (Adjacent channel power) :	>70 dB	>70 dB
阻塞 (Blocking) :	>90 dB	>90 dB
杂散响应抑制 (Spurious response) :	>60 dB	>60 dB
调制失真 (Harmonic distortion) :	<5%	<5%
互调抗扰 (Intermodulation rejection) :	>68 dB	>68 dB

附件 (OPTIONS) :



CY-LB01




CY-LB02



CY-LB02CA



CY-LB02CB

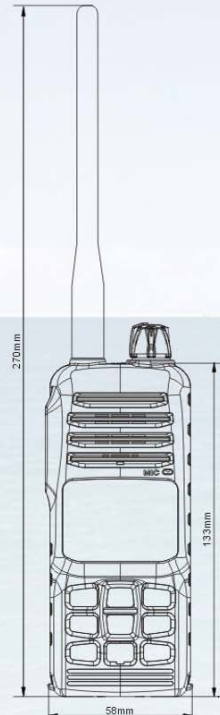

- 符合MSC 149(77)、IEC 61097-12标准要求;
- 满足温度、热冲击、振动和跌落试验的需求, 保持1米水深水密, 满足IP67标准;
- 操作方便, 即便穿着水手服也可单手操作。
- Meets MSC 149(77)、IEC 61097-12 standard requirements.
- Meets temperature thermal shock, vibration and drop resistant requirements, and retains 1m depth waterproof, conforming to IP67.
- Ease of operation with one hand, even wearing gloves.

宁波驰洋电子科技有限公司

地址: 宁波市启明路818号创新128园区21幢140号
 邮编: 315105
 电话: 0574-89067889 / 87857755 / 89067881
 传真: 0574-89067885 / 89067886
 网址: www.nbchiyang.com
 邮箱: sales@nbchiyang.com

代理商 / 经销商:
 Agent / Distributor

Ningbo Chiyang Electronic Co., Ltd

ADD: No.140 The 21th building Innovation 128 Park,
 No. 818 Qiming Rd, Ningbo, China
 P.C.:315105
 TEL:0574-89067889 / 87857755 / 89067881
 FAX:0574-89067885 / 89067886
 URL:www.nbchiyang.com
 E-mail:sales@nbchiyang.com

宁波驰洋 安然无恙